



# Care 630HF

Shandong NeoCare Medical Equipment Co. Ltd.

[www.neocare.com.cn](http://www.neocare.com.cn)

## 关于我 ABOUT US


HONESTY CREATES QUALITY

## 品展示 PRODUCT DISPLAY

Shandong NeoCare Medical Equipment Co. Ltd. (referred to as "NeoCare Medical") was established in 2014. It is a technology guided enterprise that focuses on the research and production of medical equipment imaging technology, with a focus on technology. After more than 10 years of development, the company has become a company that integrates the research and development, production, medical diagnosis, and hospital management of imaging and has grown into an enterprise with advanced technology development and production capabilities. At present, the company mainly produces X-ray photography systems, related medical image processing software, imaging equipment upgrade solutions, and services. At present, the company has more than a hundred cooperative customers and sales outlets covering various provinces, cities, and grassroots hospitals across the country, mainly providing radiology imaging equipment and services to grassroots hospitals. Aiming to produce higher quality imaging equipment and provide more comprehensive and technologically advanced medical imaging technology services.

### Our Product Range 我的品范

Model Care 300HF	200 mA - 18 kw
Model Care 400HF	300 mA - 24 kw
Model Care 400HF	400 mA - 32 kw
Model Care 500HF	500 mA - 40 kw
Model Care 630 HF	630 mA - 50 kw
Model Care 800 HF	800 mA - 60 kw
Model Care 1000 HF	1000 mA - 80 kw

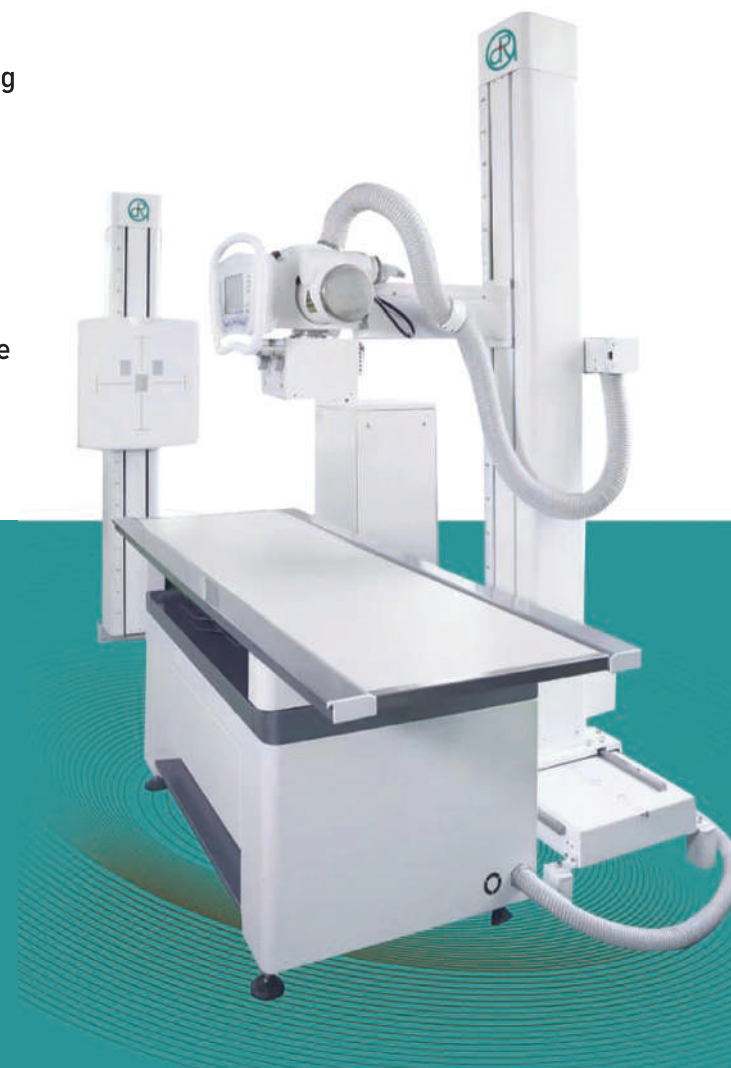

# 产品介绍

## PRODUCT INTRODUCTION

# NeoCare



## PRODUCT ADVANTAGES



### Intelligent Control

Electric lifting columns  
Electric four-way floating bed  
Automated chest X-ray tracking



### Core Components

High frequency generator  
Large capacity X-ray tube



### Advantage

Fast, multi-position photography



### X-ray tube automatic tracking detector


Make filming faster and better, effectively reducing the workload of operation technicians



Large heat  
capacity tube



Support long-term  
continuous physical  
examination

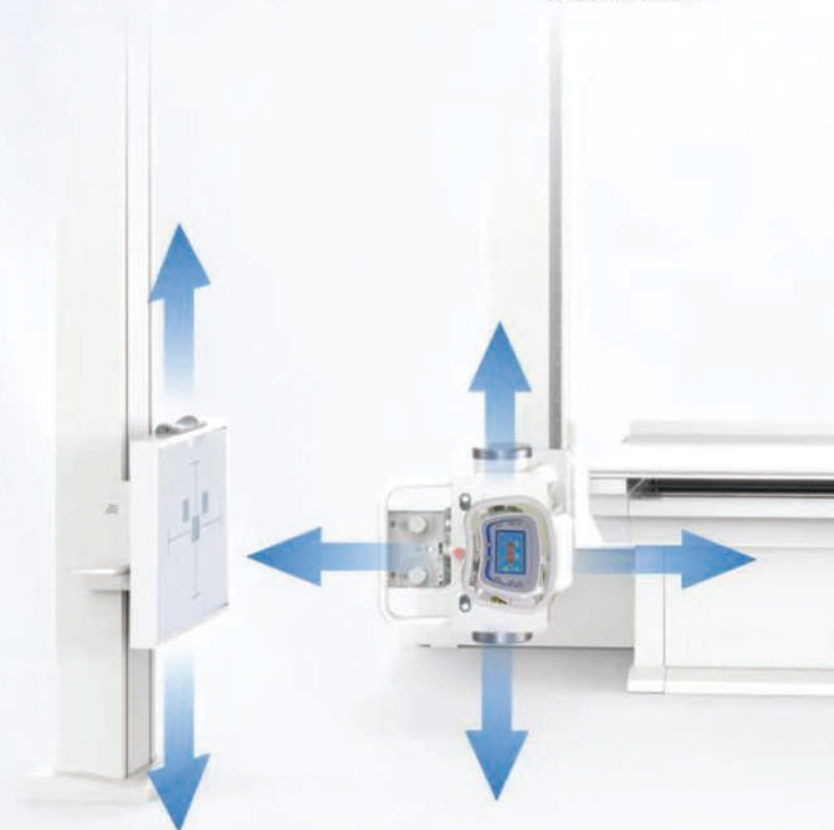

Shandong NeoCare Medical Equipment Co. Ltd.

Address: No.7 Xingtian Road, Lingcheng District, Qufu, Shandong, China 273100

Tel/Fax : +86 537 8932886 | Email : david@neocare.com | Website : www.neocare.com.cn



# Specifications

## Care 630HF

<b>Frame</b>	
Overall appearance	White
<b>Photography bed</b>	
Photography bed	Fixed height 650mm±10mm Manual, 4- way float (vertical 900mm±10mm, Horizontal 250mm±10mm). Foot control electromagnetic brake
Bed board motion control	Electromagnetic lock, power-off lock
Bed locking method	Length×width : (2130mm±10mm) × (800mm±10mm)
Bed board size	Density board
Bed board material	≥200kg
Bed board load-bearing BUCKY	Manual control, distance 500mm±10mm
Flat panel detector	Dimensions (length × width × height) : 460mm×460mm×15mm
Safety	Emergency stop switch
<b>Chest rack</b>	
Motion control	Manual lifting; electromagnetic braking, power-off braking;
Initiation power	≤50N
Braking power	≥100N
Total height	2130mm±10mm
BUCKY distance	1400mm±10mm (minimum 360, maximum 1760)
Front panel material	ABS
Flat panel detector	Dimensions (length × width × height) : 460mm×460mm×15.1mm
<b>Photography stand</b>	
Motion control	Manual lifting; electromagnetic braking, power-off braking
Initiation power	≤50N
Braking power	≥100N
Distance of the column along the track	≥1700mm
Total height	2210mm±10mm
Tube vertical distance	1240mm±10mm (minimum 540mm, maximum 1780mm)
Beam limiter	Manual beam limiter
Tube support arm	Fixed length, axial rotation (tube rotation) ±180°, axial rotation around the column not less than ±90.
<b>Transportation and storage conditions</b>	
Relative humidity	10% ~95%
Atmospheric pressure	700hPa—1060hPa
Ambient temperature	-10°C ~50°C

<b>High Pressure Generator</b>	
Output power	50kW
Rating voltage	380VAC, ±10%, 50Hz/60Hz 3phase
Inverter frequency	25kHz,±10%
kV accuracy	±5%
	≤±(5%)(mA>25mA,ms>5);
	≤±(10%+1mA)(mA≤25mA);
	≤±20%(ms≤5)
mA accuracy	Low speed
	40kV-150kV,1kv step
Rotor Speed	10-630mA
KV Range	1-6300ms
mA Range	≤±(5%+0.2ms)
ms Range	0.1-630mAs
ms accuracy	≤± (5%+0.2mAs)
mAs Range	
mAs accuracy	
<b>Light beam device</b>	
Inherent filtration	1. 5 mm Al (equivalent)
Optional additional filtering	0. 5/1. 0/1. 5mmAl
Maximum tube assembly is of high pressure	150 kV
Average irradiation brightness	3160 Lux
irradiation time	30s ±5%
Light field indicator light	24V / 5W LED lamp
Input electricity	24VAC, 0.2A
Minimum irradiation field	<20mmX20mm ; at SID 100cm
Maximum irradiation field	43 X 43cm ; at SID 100cm
Weight	6. 8kg±0. 5kg
<b>Wireless flat-panel detector</b>	
Image size	43X43cm (17"X 17")
Dimensions	46.0X46.0X1.5cm
Pixel size	139μm
X-ray Voltage Range	40-150KV
Weight	3.7kg
<b>Wired flat-panel detector</b>	
Image size	43X43cm(17" X 17")
Dimensions	46.0 X 46.0 X1.5cm
Pixel size	139μm
X-ray Voltage Range	40-150KV
Weight	3.2kg

<b>The X-ray tube assembly</b>	
Large focus for the maximum power	Large focus: 50 kW
Focal point	0. 6/1. 2mm
Heat capacity	300kHU
Heat capacity of pipe sleeve	1000kJ
Target angle	12.0°
Inherent filtration	1. 0mm Al
Added filtration	1. 5mm Al (3X0. 5 mm AL)
Weight	About 17kg
	The components are aluminum shell, tangential, oil-immersed cooled, rotating anode X-ray tube assembly.
Structure	
Leakage radiation loading factor	150kV 3.4 mA
Insulation impedance	>2MQ
Focus position and its tolerance to the	± 1.4mm
The X-ray radiation field	At SID, 420 * 420mm at 1000 mm
Power supply (neutral ground)	Single-phase, three-phase full-wave rectification or DC power supply
filament current	5.3 A
filament voltage	Big focus: 13.5±1V, small focus: 8.5±1V
Nominal anode input power	Large focus: 50KW, small focus: 20KW
Anode speed	2800 rpm
	1) Start voltage: 120- -220V;
	2)Maintenance voltage: 4060V;
Stator parameter (50Hz)	3)Subphase capacitance: 40 UF / 630V;
	4)Start time: 1 ~ 1.2s
Cooling-down method	Natural cooling or forced air cooling
Temperature range of the components in normal use	16~70°C
Maximum continuous thermal dissipation of the components	No less: 275W (23 kHU / min); Fan: 450W (37 kHU / min)
<b>Work environment requirements</b>	
Relative humidity	30% ~75%
Atmospheric pressure	700hPa—1060hPa
Ambient temperature	5°C ~40°C